

GM-1000 Telephone Line (Landline) Monitoring System

Operating Instructions

Quick Guide for Basic operation

A. Start the monitoring

Step 1. Memory a selected dial-out phone number in the SIM card memory of a prepared clean SIM card (**Totally clean without any number memorized first**) via putting it into any general mobile phone. Program it simply like enter in a general contact phone number in the phone book function & choose to memorize it in the **SIM card memory** (Not in the phone memory) with a **01** contact name

Step 2. Pull out the SIM card then insert it into GM-1000 then install it with the house telephone line & switch the power on. As long as the house telephone is used (whatever dial-in or dial-out) an automatic call would be dialed to the pre-memorized phone number by the SIM card simultaneously

B. Stop the monitoring

Option 1. Simply switch off the power of the unit directly


Option 2. Or sending a SMS via texting **XXX050** to stop the monitoring function (**OFF-Mode**) while texting **XXX051** remotely back to monitor mode (**ON-Mode**)

Remark:

XXX = Three-digit ID code for each individual GM-1000 (As indicated outside the unit)

**The unit will be always set back on monitoring mode (ON-Mode) once the unit is powered off then on

*****SMS: Short-Message-Service, the available basic function of all kinds of GSM mobile phone.**

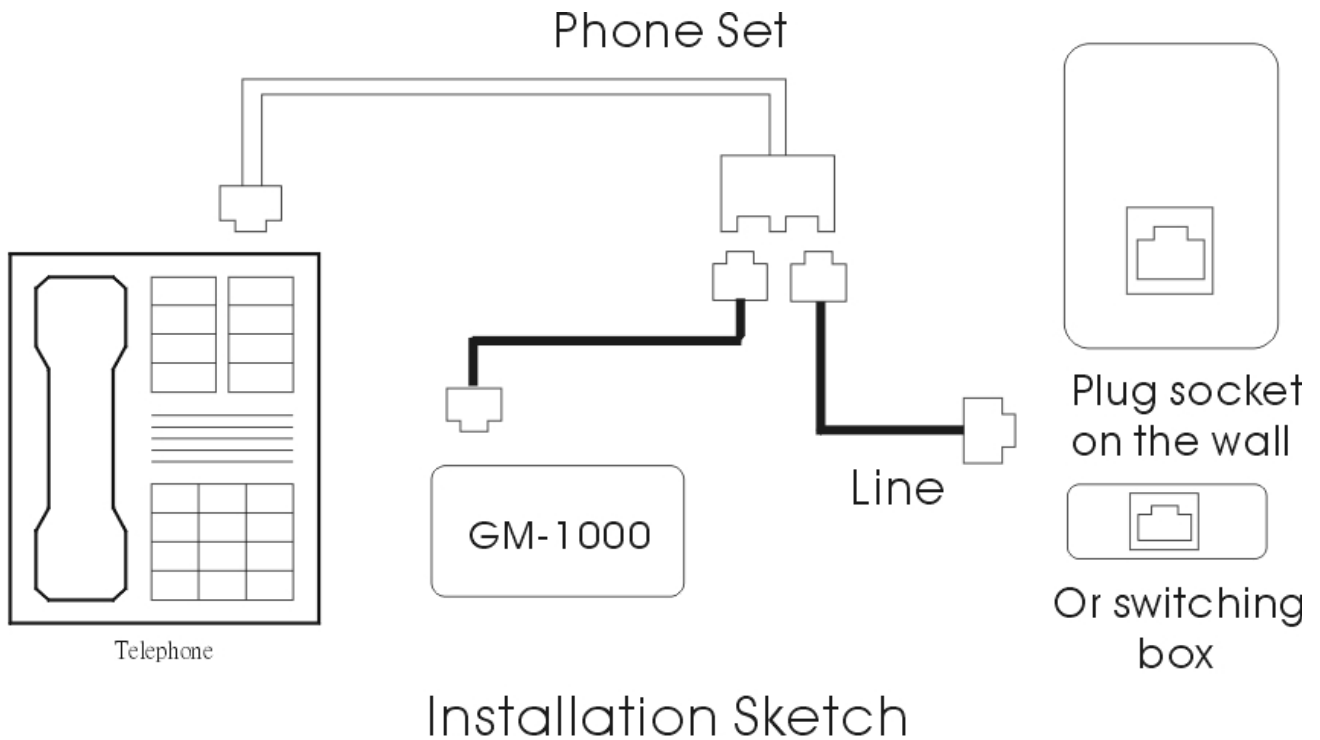

Trouble Shooting

1. When starting to use the unit at very first time do make sure the battery has been charged well. Its strongly suggested charging the battery 4~8 hours before starting to use, otherwise the unit might not operate properly.
2. While using a general mobile phone to memory a default dial-out number in the SIM card, do make sure to choose memorizing it in the [SIM CARD] memory, not the [phone] memory. Otherwise the phone number will be still left at the mobile phone memory instead of the SIM card memory while switch the SIM card from the phone to the GM-1000. The total functions would be failed if there memorize none of any default dial-out number in the SIM card which is supposed to be put into the GM-1000.
3. Before put a SIM card into GM-1000. Do make sure the SIM card is totally clean in its memory. And set off any checking code (such as PIN code) procedure if there is any. The obtained SIM card is supposed to be only used for the GM-1000.
4. To check the power offering, GSM or sensor system work normal or not by recognition of the status of the LED light outside the case.